



# HERON 10 SB

EN

VERTICAL MAST RANGE




**PL** **TFORM**  
B A S K E T

RAISING THE STANDARD




MADE IN ITALY

# HERON 10 SB

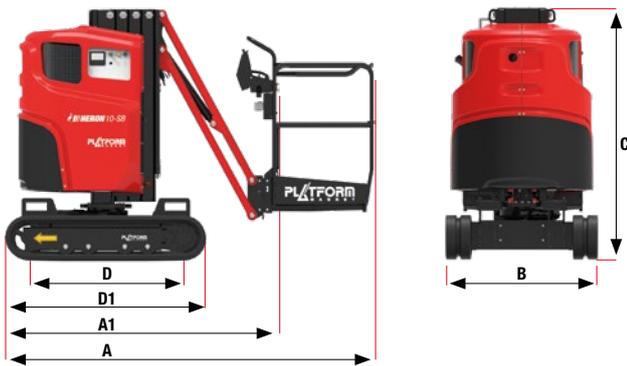

SPECIFICATIONS		STD	E
Max working height	m		9,3
Max platform height	m		7,3
Max horizontal working reach	m		3,45
Max working height at max reach	m		8,3
A - Overall length	m		3,25
A1 - Overall length without basket	m		2,71
B - Overall width	m		1,2
C - Overall height	m		1,99
D - Wheelbase	m		1,23
Platform dimensions	m		0,92 x 0,77
Platform capacity inside	kg		230
Platform capacity outside	kg		230
Turning radius inside/outside	m		0 / 1,21
Turret rotation	°		± 180
Max slope	degrees/%		35% - 19°
Max working tilt x/y	degrees/%		5,25% - 3°
Max speed stowed	Km/h		2,8
Max speed not stowed	Km/h		1
WEIGHTS		ST	E
Weight in working conditions	kg	2750	2800
Ground pressure in tracks	kg/cm <sup>2</sup> (kPa)	1,9 (183)	-
Ground pressure on stabilizer	kg/cm <sup>2</sup> (kPa)	2,4 (233)	-
POWER		ST	E
DIESEL ENGINE	9,9 kW / 13 HP @3600 rpm	•	-
ELECTRIC MOTOR	8 kW / 48 Vdc	-	•
TRACTION BATTERY	48Vdc 210 Ah Lead Acid	-	•

## Working diagram on crawlers




INDOOR	
160 kg	Wind max 0 km/h
70 kg	Manual Force max. 400N
<b>TOT. 230 kg</b>	

OUTDOOR	
80 kg	Wind max 45 km/h
150 kg	Manual Force max. 200N
<b>TOT. 230 kg</b>	


## OPTIONAL:

- Single-man basket
- Non-marking rubber tracks

## Jib free when machine stowed

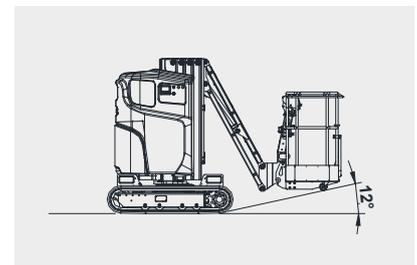

## Max. slope 35%

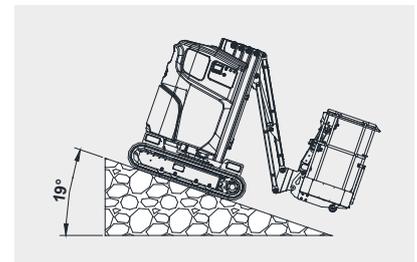

# PLATFORM BASKET



Via Montessori, 1 - 42028 Poggio (RE) Italy  
 Ph. +39 0522 967666 - Fax +39 0522 967667  
 E-mail: info@platformbasket.com

